

Semiconductor Fuses

LV HRC SITOR Fuse Links


Rated voltage 660 V AC

Characteristic curves


Series 3NC8 4..

Size: 3
Operational class: gR or aR
Rated voltage: 660 V AC
Rated current: 150 ... 1000 A


Time/current characteristics diagram

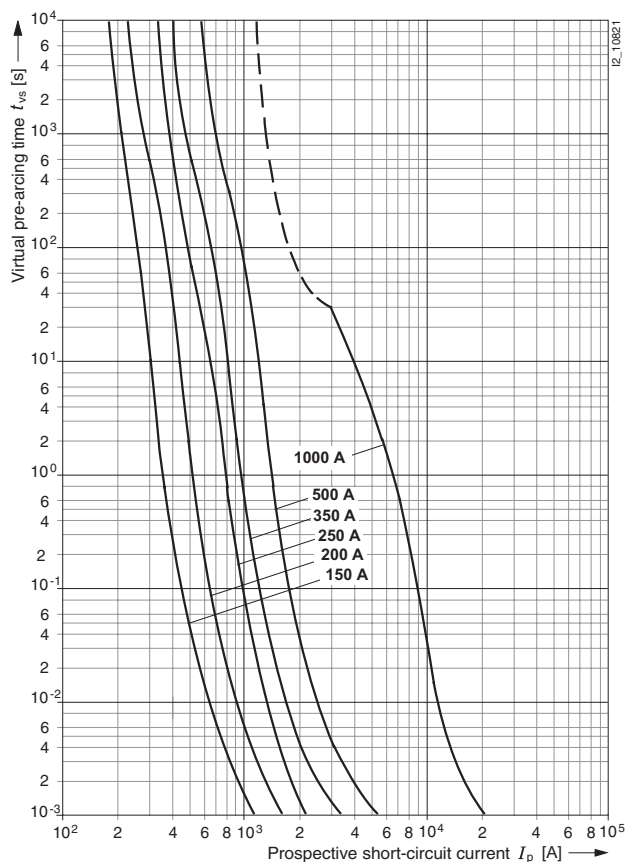

Let-through characteristics (current limitation at 50 Hz)

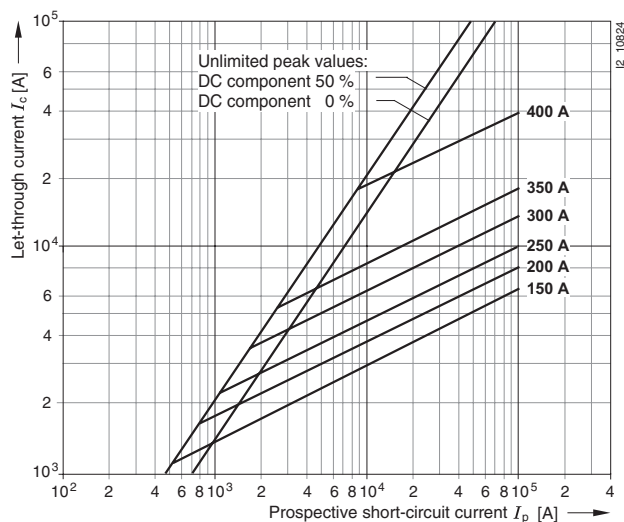

Correction factor k_A for breaking I^2t value

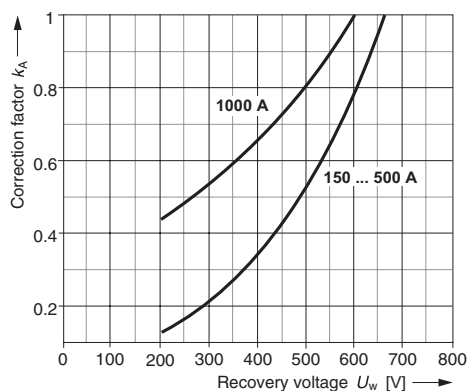

Peak arc voltage

