

Semiconductor Fuses

LV HRC SITOR Fuse Links


Rated voltage 690 V AC/700 V DC

Characteristic curves


Series 3NE8 71.-1, 3NE8 70.-1

Size: 000
Operational class: gR or aR
Rated voltage: AC 690 V/ 700 V DC
Rated current: 20 ... 63 A


Time/current characteristics diagram

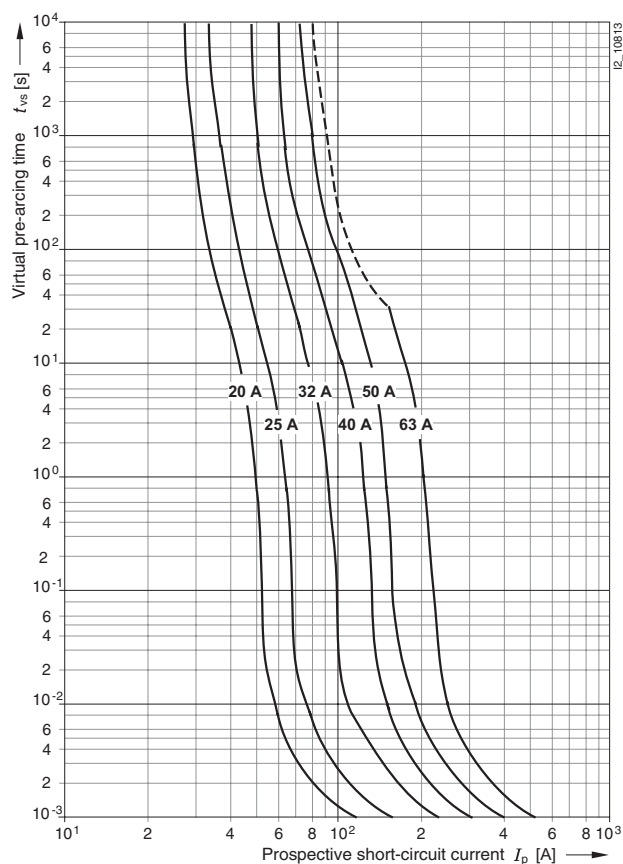

Let-through characteristics (current limitation at 50 Hz)

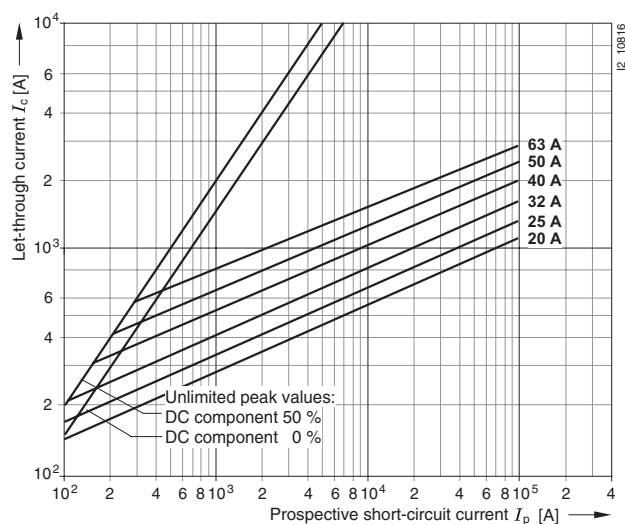

Correction factor k_A for breaking I^2t value

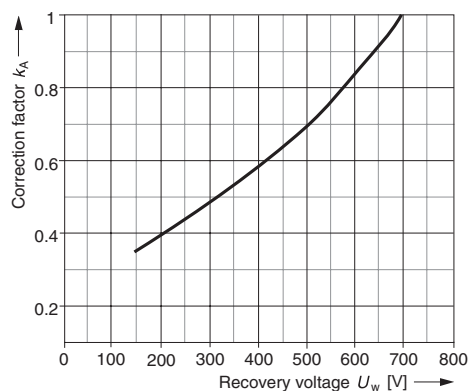

Peak arc voltage

